



PERFORMANCE PLUS OILS AND LUBRICANTS
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

FULL SYNTHETIC MULTI-VEHICLE AUTOMATIC TRANSMISSION FLUID

Performance Plus® Full Synthetic Multi-Vehicle Automatic Transmission Fluid is specially formulated with a unique combination of synthetic base stocks and an advanced additive technology to ensure peak performance in the latest automatic transmissions. This premium quality product is further enhanced to meet and exceed the frictional and wear requirements of most automatic transmissions regardless of age. Full Synthetic Multi-Vehicle Automatic Transmission Fluid carries formal approval of MERCON® LV and DEXRON® VI, recognized by both Ford Motor Company and General Motors for performance and protection.

PERFORMANCE PLUS PROPERTIES	
Kinematic Viscosity cSt @ 40°C	28.7
cSt @ 100°C	5.9
Viscosity Index	154
Brookfield Viscosity cP @ -40°C	10,200
Copper Corrosion	1B
API Gravity	31.5
Specific Gravity 15.6°C (60°F)	0.868
Flash Point, °C (°F)	208 (406)
Pour Point, °C (°F)	-51 (-60)
Color	Red

Approvals and Specifications

Performance Plus® Full Synthetic Multi-Vehicle ATF has been formally approved to meet the following specifications:

MERCON® LV	License #MLV160802
DEXRON® VI	License #J-60187

Since Performance Plus® Full Synthetic Multi-Vehicle ATF meet the latest stringent requirements of leading automobile manufacturers, they are suitable for the following OEMs (where applicable**):

Chevrolet	General Motors
Lexus	Acura
Lincoln	Kia
Mazda	Fiat
GMC	Infiniti
Dodge	Jeep
Chrysler	Volvo
Buick	Subaru
Land Rover	Jaguar
Cadillac	Mercedes-Benz
Volkswagen	BMW
Mitsubishi	Volvo

*A full list of Applications is listed on Page 3

Note: Values shown above are representative of current production and may vary within modest ranges

Not recommended for DCT or CVT Transmissions

**Information regarding recommended maintenance and equipment operating conditions can be found by referencing Original Equipment Manufacturer's (OEM) owner's manual and recommended lubricant grades.

All company, product and service names inclusive of product and brand names are property of their respective owners and for identification purpose only. Whilst some products may carry the respective approvals, visuals are not intended to serve as a recommendation or endorsement.

Rev.7/20



PERFORMANCE PLUS OILS AND LUBRICANTS
PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE


FULL SYNTHETIC MULTI-VEHICLE AUTOMATIC TRANSMISSION FLUID

Features and Benefits: Performance and Protection in modern transmissions and demanded by drivers, and those who demand the best for their vehicle demand Performance Plus Automatic Transmission Fluid. Our product has been tested, proven and is trusted to deliver the very best in the industry. In addition, Performance Plus Automatic Transmission Fluid delivers:


- Formulated to protect against oxidation
- Superior additives to enhance friction properties
- Excellent anti-wear protection
- Thermally stable formulation
- Outstanding low temperature performance

- Protecting for bushings, gears and clutch plates
- Avoiding clutch shudder and slippage
- Extending the life of the transmission
- Performing in extreme temperature conditions
- Essential protection to vital transmission components

Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high quality base oils and additives.

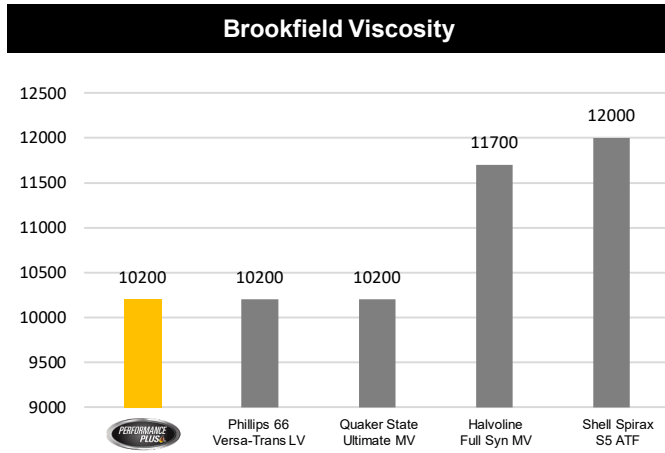

Performance Plus® delivers superior lubrication flow to vital components faster and more efficiently thus significantly reducing critical transmission wear during cold temperature operation.

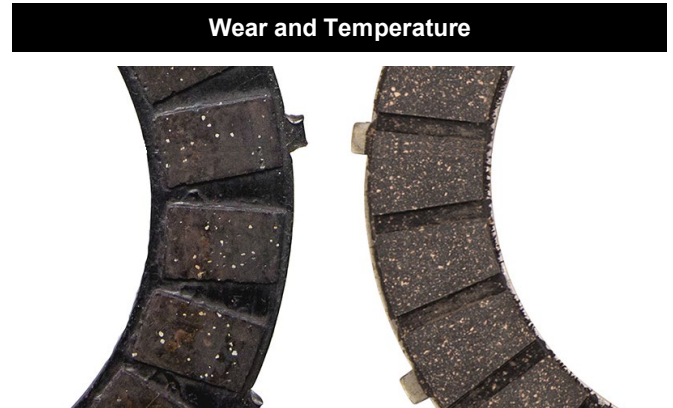

The image on the left shows damage from wear, and the image on the right show the protection provided by Performance Plus.

The greatest amount of wear occurs at low temperature start-up, Performance Plus® is formulated to protect critical transmission components in these conditions to greatly extend the life of your transmission.

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and flames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.7/20



PERFORMANCE PLUS OILS AND LUBRICANTS

PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

Applications*

Performance Plus® has not only proven and tested to bring power and protection, it can also be utilized in a wide array of applications making it one of the most versatile products in the industry. Performance Plus® Full Synthetic Multi-Vehicle ATF can be used in the following applications:

Acura ATF-Z1
Aisin Warner JWS 3309 (T-IV)
Aisin Warner JWS 3324 (WS)
Aisin Warner AW-1
Allison C-3 & C-4
American Motors ATF +3 (MS7176-E)
ATF RED 1, RED 1K
Audi 5 HP LT71141 (ZF 5 HP 18FL/19FL/24A)
Audi/VW G 052 025-A2
Audi/VW G 053 025-A2
Audi/VW G 052 162-A1/A2
Audi/VW G 055 025 A2 (JWS 3309)
Audi/VW G 052 162 (ZF Lifeguardfluid 5)
Audi/VW G 052 162 (ZF No. S671 090 170)
Audi/VW G 055 162-A2, -A6 (ZF Lifeguardfluid 6 Plus)
Audi/VW G 055 162-A2, -A6 (ZF No. S671 090 281)
Audi/VW G 060 162 (ZF Lifeguardfluid 8)
Audi/VW G 060 162 (ZF No. S671 090 312)
Audi/VW G 052 990
Audi/VW G 055 540 (A2)
Audi/VW 052 055
Bentley PY112995PA
BMW JWS 3309 (T-IV)
BMW LA2634
BMW LT71141 (ZF 5 HP 18FL/19FL/24A)
BMW ZF 5HP18FL, 5HP24, 5HP30
BMW 7045E
BMW ETL 8072B
BMW MINI
Bosch TE-ML 09
CAT TO-2
Chrysler ATF+, +2, +3 (MS 7176E)
Chrysler/Dodge MOPAR AS 68 RC
Chrysler/Dodge MOPAR AS 69 RC (T-IV)
Chrysler/Dodge MOPAR JWS 3309
Chrysler/Dodge/Jeep 05127382AA
Chrysler/Dodge/Jeep 68043742AA
Chrysler/Dodge/Jeep 68157995AA
Chrysler/Dodge/Jeep 68157995AB
Chrysler/Dodge/Jeep 68218925AA
Chrysler/Dodge/Jeep 68171866AA
Daewoo LT 71141
Daihatsu AMMIX ATF D-II
Daihatsu AMMIX ATF D-III SP
Esso LT 71141
FIAT T-IV type, JWS 3309
Ford MERCON®
Ford MERCON® LV (FF-WSS-M2C-938A/SF, XT-10 QL V)
Ford FNR5 (Mazda M5, XT-9-QMM5)
Ford WSS M2C 138CJ, 166H
Ford WSS M2C 922A1, 924A (XT-8-QAW) JWS 3309

Ford/Lincoln/Mercury XT-2-QDX (M)
Ford/Lincoln/Mercury XT-2-QSM (Syn)
Ford ESP-M2C166H, XL-12
Fuso ATF-II
Fuso ATF-SPIII
Fuso ATF-A4
GM9986195 (Aisin AW, JWS 3309)
GM TASA
GM DEXRON®-II, -IID, -IIE, -IIIG, -IIIH, & -VI
GM 1940700
GM 1940767
GM 21005966
GM 22717466
GM 88900925
GM 9986195
GM 93160393
GM/GMC/Opel/Saturn AW1
GM/GMC/Opel/Saturn VI
GM/GMC/Opel/Saturn 88863400
GM/GMC/Opel/Saturn 88863401
Hino Blue ribbon ATF
Honda ATF-Z1 (except in CVTs)
Honda ATF Ultra II
Honda DW-1
Honda Type 3.0 & Type 3.1
Hyundai/Kia SP-IV (00232-1904/04500-00115)
Hyundai/Kia SP-IV M (SP4-M)
Hyundai/Kia SPH-IV
Hyundai/Kia SP-IV-RR
Hyundai/Kia SP-III
Hyundai/Kia Dex-II/ SP-II
Hyundai/Kia JWS 3314
Hyundai/Kia NWS 9638
Hyundai/Kia 040000C90SG
Hyundai/Kia NUMM040 CH20 Red-1
Idemitsu K17 3100 PL085
ISUZU BESCO ATF-II
ISUZU BESCO ATF-III
ISUZU BESCO ATF SP
ISUZU SCS Fluid
ISUZU 08200-9001
Jaguar ATF 3403 M115, ATF 3403-M115
Jaguar ATF LT71141, ZF 5HP24
Jaguar JLM20238
Jaguar ATF 3403 JLM20238
Jaguar K17
Jaguar JLM 20292
Jaguar Fluid 8432
Jaguar 02JDE26444
Jaguar WSS-M2C922A1
JASO M315-2013 1A

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.7/20



PERFORMANCE PLUS OILS AND LUBRICANTS

PERFORMANCE UNDER THE MOST EXTREME CONDITIONS



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

Applications*

Performance Plus® has not only proven and tested to bring power and protection, it can also be utilized in a wide array of applications making it one of the most versatile products in the industry. Performance Plus® Full Synthetic Multi-Vehicle ATF can be used in the following applications:

JASO M315-2013 1A-LV
JASO M315-2013 2A
JEEP ATF+3
KIA ATF SP-II
KIA ATF SP-III
KIA ATF SP-IV
KIA ATF SP-IVM
KIA ATF Red 1
Land Rover LR023288
Lexus JWS 3309
MAN 339A
Mazda ATF D-II, M-III, M-V, FZ, F-1, S-1, & N-1
MAZDA ATF 3317
MB ZF 4HP20
MB 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.8
MB 236.9, 236.10, 236.11, 236.12, 236.14, 236.41
MINI COOPER T-IV
Mitsubishi Diaqueen SK
Mitsubishi Diaqueen SP-II
Mitsubishi Diaqueen SP-III
Mitsubishi Diaqueen SP-IV
Mitsubishi Diaqueen AW
Mitsubishi Diaqueen J2
Mitsubishi Diaqueen J3
Mitsubishi Diaqueen ATF-MA1
Mitsubishi Diaqueen ATF PA
NAG 1 (Chrysler, Jeep, Cherokee)
Nissan Matic Fluid C, D, J, K, and S
Opel/GM 19 40 700
Opel/GM 19 40 767
Opel/GM 21005966 Transaxle
Opel/GM 22 17466
Opel/GM 88900925
Opel/GM 9986195
Peugeot ZF 4HP20
Peugeot/Citroen Z 000169756
Peugeot/Citroen (PSA) AL4 Automatic gearbox oil (#9730.AE)
Porsche ZF 5HP19FL, ZF 5HP20, LT71141
Porsche ATF 3403-M115
Porsche T-IV (JWS 3309)
Porsche 000 043 205 09
Porsche 999 917 547 00 (A2)
Porsche 000 043 205 28
Porsche Z 000169756
Renault DPO/AL4
Renault Matic D2
Renault Samsung SATF-D
Saab T-IV (JWS 3309)
Saab 93 165 147
Saab 93 160 393

Saturn T-IV (JWS 3309)
Scion (all vehicles)
Shell 3403, M115, LA 2634
Shell L 12108
Ssang yong DSIH 5M-66
Subaru ATF
Subaru K0140Y0700
Subaru ATF 5AT
Subaru DEXRON®-II
Subaru ATF & ATF HP
Suzuki ATF AW-1
Suzuki AT OIL 5D06
Suzuki ATF 2326
Suzuki ATF 2384K
Suzuki JWS 3309
Suzuki ATF 3314
Suzuki ATF 3317
Texaco 7045-E
Texaco 8072B
Texaco N402
Toyota ATF D-II & D-III
Toyota ATF T-III & T-IV
Toyota ATF WS
Toyota Hybrid
Vickers M2950-S, I-286-S
Voith 55.6335.xx (G607)
Voith Svc Bltn #013 and #118
Volvo 97325
Volvo 97335
Volvo CE 97340
Volvo PN 1161521
Volvo PN 1161540/1161640
Volvo PN 31256774/31256675
Volvo PN 1161621
VW 5 HP (ZF 5 HP 30)
VW 5HP (18FL, 30)
VW 5HP (19FL, 24A)
VW G-055-025 A2 (JWS 3309)
VW G055 540 (A2)
VW G 052 162 (ZF Lifeguardfluid 5
VW G 055 162-A2, -A6 (ZF Lifeguardfluid 6 Plus)
VW G 060 162 (ZF Lifeguardfluid 8)
VW G US 000 162
VW TL 521 62
ZF all 3 & 4 speed transmission
ZF 8 speed transmissions
ZF 9 speed transmissions
ZF TE-ML 05L
ZF TE-ML 09
ZF TE-ML 11A, 11B
ZF TE-ML 21L

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.7/20